


# ESD Protection Diodes

Low Capacitance ESD and Transient Voltage Protection


SD2403F10L DFN1006

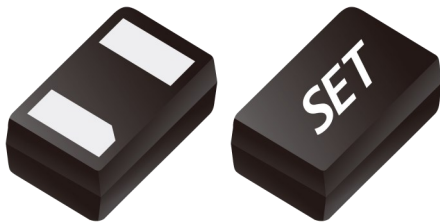

## Description

SD2403F10L is a low-capacitance Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for data, control or power lines. With maximum capacitance of 17 pF only, SD2403F10L is designed to protect parasitic-sensitive systems against over-voltage and over-current transient events. It complies with IEC 61000-4-2 (ESD), Level 4 ( $\pm 15$  kV air,  $\pm 8$  kV contact discharge), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

## Pinout and Functional Block Diagram



SD2403F10L uses ultra-small DFN1006 package.

Each SD2403F10L device can protect one data line. It offers system designers flexibility to protect single data line where space is a premium concern.

## Applications

- Serial and Parallel Ports
- Notebooks, Desktops, Servers
- Projection TV
- Cellular handsets and accessories
- Portable instrumentation
- Peripherals

## Features

- IEC61000-4-2 (ESD)  $\pm 15$  kV (Air),  $\pm 8$  kV (Contact)
- IEC61000-4-4 (EFT) 40 A (5 / 50 ns)
- IEC61000-4-5 (Lighting) 3 A (8 / 20  $\mu$ s)
- 150 Watts Peak Pulse Power Per (tp=8 / 20  $\mu$ s)
- Low Capacitance: 17 pF (Maximum)
- Low Leakage Current
- Low Clamping Voltage
- Flammability Rating: UL 94 V-0
- Halogen Free and RoHS Compliant

## Order Information

Type	Package	Marking	Size (mm)	Delivery Form	Delivery Quantity
SD2403F10L	DFN 1006	DH	1.00 x 0.60 x 0.50	7" T&R	10000 PCS

## Electrical Characteristics

( $T_A = 25$  °C, unless otherwise specified)

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{ESD}$	Electrostatic Discharge Voltage	IEC 61000-4-2; Contact Discharge	-	$\pm 20$	kV
		IEC 61000-4-2; Air Discharge	-	$\pm 30$	kV
$P_{PP}$	Peak Pulse Power (8 / 20 $\mu$ s)	$I_{PP}=3.0$ A, $t_P=8 / 20$ $\mu$ s	-	150	W
$T_A$	Operating Temperature Range	-	-55	150	°C
$T_{stg}$	Storage Temperature Range	-	-55	150	°C


# ESD Protection Diodes

Low Capacitance ESD and Transient Voltage Protection

SD2403F10L

DFN1006


## Package Dimensions - DFN1006

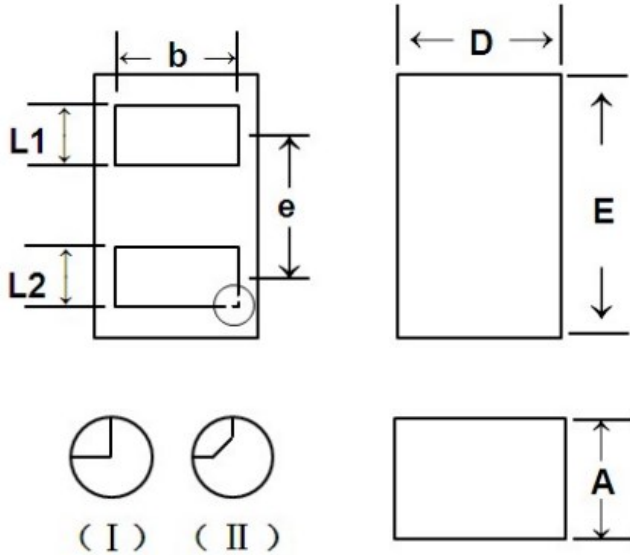

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
D	0.55	0.65	0.022	0.026
E	0.95	1.05	0.037	0.041
L1	0.20	0.30	0.008	0.012
L2	0.20	0.30	0.008	0.012
A	0.45	0.55	0.018	0.022
b	0.45	0.55	0.018	0.022
e	0.64 BSC		0.025 BSC	

## Recommended Solder Pad Footprint

(Ratings at 25 °C ambient temperature unless otherwise specified.)

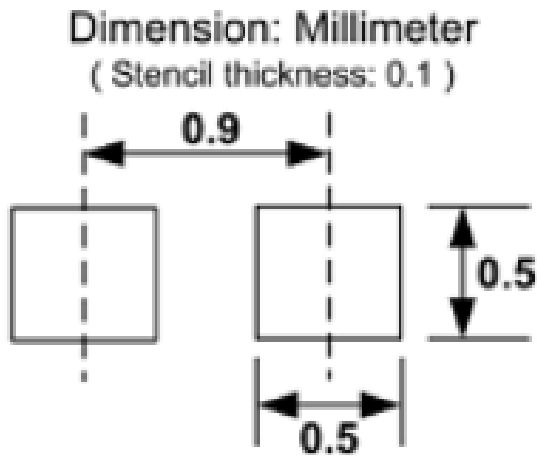

## Soldering Footprint

# ESD Protection Diodes

Low Capacitance ESD and Transient Voltage Protection

SD2403F10L DFN1006

## Electrical Characteristics

( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified)

Symbol	Parameter	Conditions	Min	Typ.	Max	Unit
$V_{RWM}$	Reverse Working Voltage	$T_A = 25\text{ }^\circ\text{C}$	-	-	24	V
$V_{BR}$	Breakdown Voltage	$I_R = 1\text{ mA}$ ; $T_A = 25\text{ }^\circ\text{C}$	26	-	32	V
$I_R$	Reverse Leakage Current	$V_{RWM} = 24\text{ V}$ ; $T_A = 25\text{ }^\circ\text{C}$	-	-	0.1	$\mu\text{A}$
$V_C$	Clamping Voltage	$I_{PP} = 1\text{ A}$ , $t_p = 8/20\text{ }\mu\text{s}$	-	-	36	V
		$I_{PP} = 3.0\text{ A}$ , $t_p = 8/20\text{ }\mu\text{s}$	-	-	50	V
$C_J$	Junction Capacitance	$V_R = 0\text{ V}$ , $f = 1\text{ MHz}$	-	13	17	pF

## Performance Curve for Reference

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

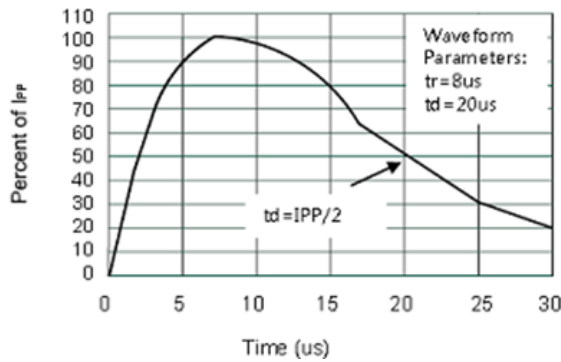


FIGURE 1  
Pulse Waveform

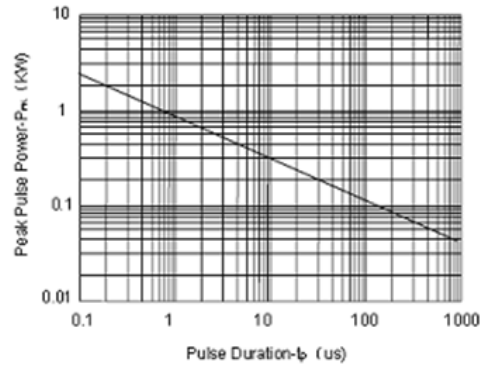


FIGURE 2  
Non-Repetitive Peak Pulse Power VS. Pulse Time


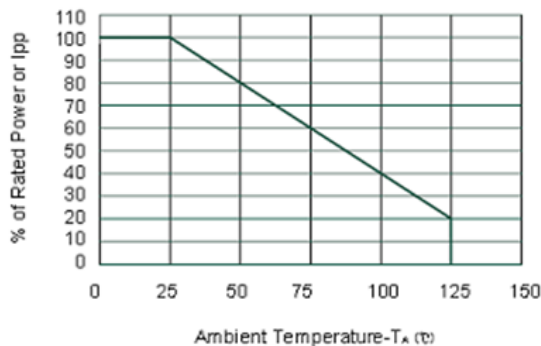


FIGURE 3  
Power Derating Curve

Soldering Parameters

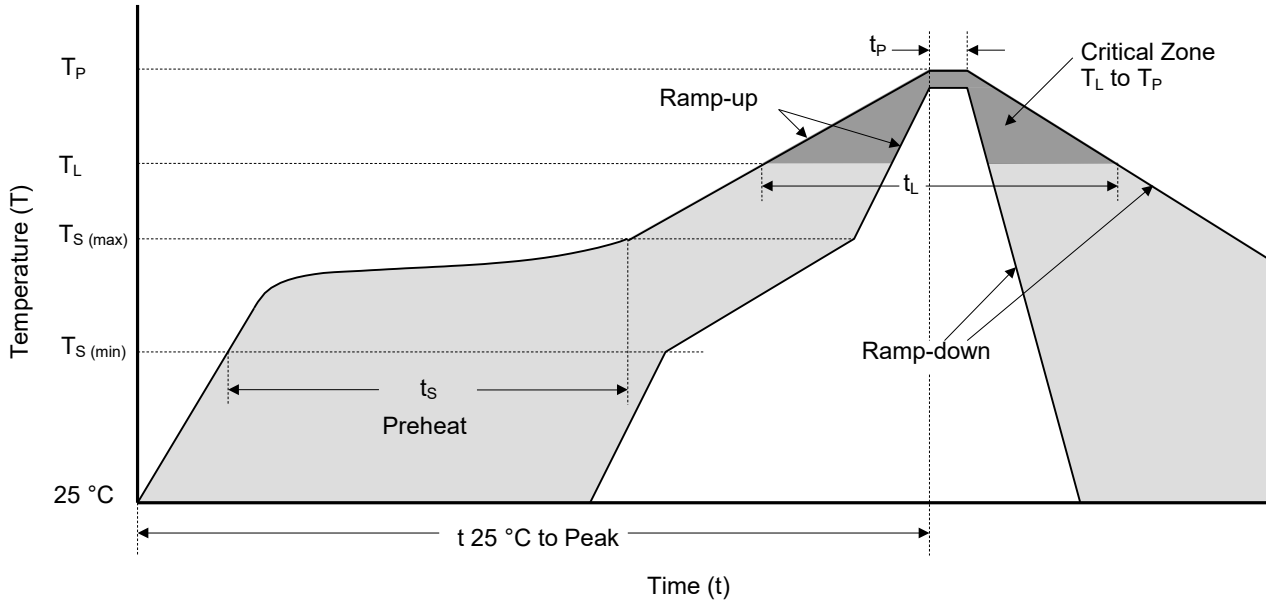

Reflowing Condition

Reflow Soldering Parameters		Lead-Free Assembly
Pre-heat	Temperature Min ( $T_{S (min)}$ )	150 °C
	Temperature Max ( $T_{S (max)}$ )	200 °C
	Time (min to max) ( $t_s$ )	60 ~ 120 seconds
Average Ramp Up Rate (Liquidus Temp ( $T_L$ ) to Peak)		3 °C / second max.
$T_S (max)$ to $T_L$ Ramp-up Rate		3 °C / second max.
Reflow	Temperature ( $T_L$ ) (Liquidus)	217 °C
	Time (min to max) ( $t_L$ )	60 ~ 150 seconds
Peak Temperature ( $T_P$ )		260 <sup>+0/-5</sup> °C
Time of within 5 °C of Actual Peak Temperature ( $t_p$ )		20 ~ 40 seconds
Ramp-down Rate		6 °C / second max.
Time from 25 °C to Peak Temperature		8 Minutes max.
Do Not Exceed		260 °C



# ATTENTION

## Usage

1. TVS must be operated in the specified ambient temp.
2. Do not clean the TVS with strong polar solvent such as ketone, esters, benzene and halogenated hydrocarbon, to avoid damaging the encapsulating layer.
3. Please do not apply severe vibration, shock or pressure to TVS, to avoid element cracking.

## Replacement

1. If TVS is visually damaged, please replace it.
2. TVS is a non-repairable product. For safety sake, please use equivalent TVS for replacement.

## Storage

1. Storage Temp. Range: (-55 to 150) °C.
2. Do not store the TVS at the high temp., high humidity or corrosive gas environment, to avoid influencing the solder-ability of the lead wires. The product shall be used up within 1 year after receiving the goods.

## Environmental Conditions

1. TVS should not be exposed to the open air, nor direct sunshine.
2. TVS should avoid rain, water vapor or other condition of high temp. and high humidity.
3. TVS should avoid sand dust, salt mist, or other harmful gases.

## Max. Typical Capacitance of TVS

The typical capacitance of TVS is listed in the specifications. Designers may refer to it when designing TVS in High frequency circuit.

## Installation Mechanical Stress

1. Do not knock TVS when installing, to avoid mechanical damage.
2. Please do not apply severe vibration, shock or pressure to TVS, to avoid surface resin or element cracking.

# ESD Protection Diodes


















































Low Capacitance ESD and Transient Voltage Protection

SD2403F10L

DFN1006

## Circuit Diagram

## Package Outline

	DFN0603		DFN1006		DFN1006-3L		DFN1610		DFN2020-3L		1CH/UNI		1CH/BI		2CH/UNI		2CH/BI		1CH/UNI		1CH/BI		2CH/UNI		2CH/BI		1CH/UNI		1CH/BI		2CH/UNI		2CH/BI		1CH/UNI		1CH/BI		2CH/UNI		2CH/BI		4CH/UNI		5CH/UNI		8CH/UNI		
	SOD-923		SOD-523		SOD-323		SOD-123		SOT-143		1CH/UNI		2CH/UNI		4CH/UNI		8CH/UNI		1CH/UNI		2CH/UNI		2CH/BI		4CH/UNI		4CH/UNI		2CH/BI		SOT-23		SOT-363		SOT-23-6L		4CH/UNI		2CH/UNI		DFN1610-6L		DFN2010-8L		DFN2510		DFN2626-10L		DFN3810-9L